

# HyperDeck Extreme 8K HDR



**\$4,995**

8K broadcast deck with the trusted reliability of HyperDeck combined with advanced H.265 recording, internal cache, 3D LUTs, native 8K and HDR support. Large touch screen to view your recording with dedicated buttons for play, stop and record, plus a mini timeline for scrolling through your recordings. You can even image swipe to jog! The LCD includes a heads up display of timecode, video standard, media status and audio meters and more!

## Connections

### SDI Video Inputs

4

### SDI Video Outputs

5 (12G-SDI A,B,C,D and 3G-SDI Monitor Out)

### SDI Rates

270Mb, 1.5G, 3G, 6G, 12G.

### HDMI 2.0 Video Inputs

1

### HDMI 2.0 Video Outputs

1

### Analog Video Inputs

1 x Component YUV on 3 BNCs,  
1 x Composite NTSC/PAL on 1 BNC.

### Analog Video Outputs

None.

### Analog Audio Inputs

4 Channels of professional balanced analog audio via XLR connectors and 2 channels of consumer unbalanced via RCA connectors.

### Built in Speaker

Mono

### Screen

7 inch 1920 x 1200. 2000 nit DCI-P3  
100% HDR LCD

### Timecode Connections

1 x XLR in and 1 x XLR out.

### Reference Input

Tri-Sync or Black Burst.

### SDI Audio Inputs

16 channels embedded audio.

### SDI Audio Outputs

16 channels embedded audio.

### HDMI Audio Inputs

8 channels embedded audio.

### HDMI Audio Outputs

8 channels embedded audio.

### Remote Control

1 x RS-422 In, 1 x RS-422 Out.

### Recorder Configuration

Via user interface or  
Blackmagic HyperDeck Ethernet Protocol.

### Ethernet



10Gb/s

### External Recording

1 x USB-C 3.1 Gen 2 (up to 10Gb/s) for  
external disk recording.

### Computer Interface

1 x USB-C for software updates.

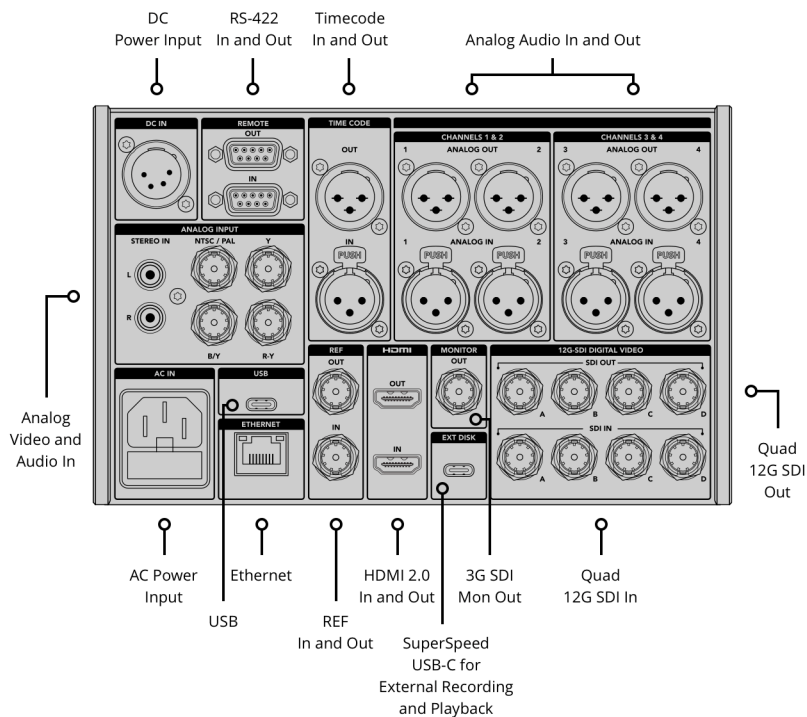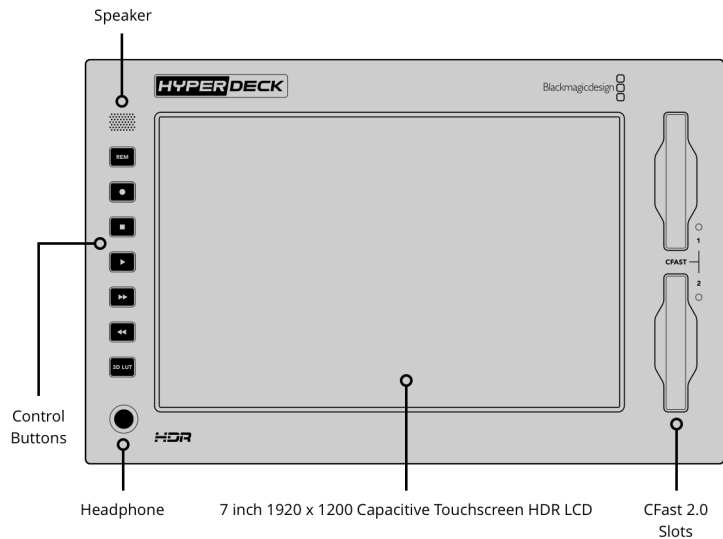

## Standards

### SD Video Standards

525i59.94 NTSC, 625i50 PAL

### HD Video Standards

720p50, 720p59.94, 720p60  
 1080i50, 1080i59.94, 1080i60  
 1080p23.98, 1080p24, 1080p25,  
 1080p29.97, 1080p30, 1080p50,  
 1080p59.94, 1080p60  
 1080PsF23.98, 1080PsF24,  
 1080PsF25, 1080PsF29.97, 1080PsF30

### 2K DCI Video Standards

1080p23.98 DCI, 1080p24 DCI,  
 1080p25 DCI  
 1080PsF23.98 DCI, 1080PsF24 DCI,  
 1080PsF25 DCI

### Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,  
 2160p29.97, 2160p30, 2160p50,  
 2160p59.94, 2160p60

---

**4K DCI Video Standards**

2160p23.98 DCI, 2160p24 DCI,  
2160p25 DCI

**8K Video Standards**

4320p23.98, 4320p24, 4320p25,  
4320p29.97, 4320p30, 4320p50,  
4320p59.94, 4320p60

**8K DCI Video Standards**

4320p23.98 DCI, 4320p24 DCI,  
4320p25 DCI

**SDI Compliance**

SMPTE 259M, SMPTE 292M, SMPTE  
296M, SMPTE 372M, SMPTE 424M,  
SMPTE 425M Level A and B, SMPTE  
2081-1, SMPTE 2081-10, SMPTE  
2082-1, SMPTE 2082-10 and SMPTE  
2084.

**SDI Metadata Support**

HD RP188 and closed captioning  
CEA-708. HDR Metadata supported  
on SDI.

**Audio Sampling**

Television standard 24-bit, 48 kHz  
sample rate.

**Video Sampling**

4:2:2 YUV

**Color Precision**

10-bit

**Color Space**

REC 601, REC 709, REC 2020. 33 point  
3D LUTS can be applied via the LUTS  
menu tab.

**Multi Rate Support**

Auto detection of SD, HD, 6G-SDI,  
12G-SDI, 2SI Quad Link 12G-SDI.

**Copy Protection**

HDMI input is unable to capture from  
copy protected HDMI sources. Always  
confirm copyright ownership before  
capture or distribution of content.

---

**Media****Cache Recording**

Slot for optional M.2 PCIe NVMe card  
for cache recording up to 16Gb/s.  
60mm 80mm and 110mm supported.

**Media**

2 x CFast 2.0 card slots and 1 x USB-C  
3.1 Gen 2 expansion port for external  
recording of SD, HD, Ultra HD and 8K.

**Media Type**

CFast card and external USB-C  
flash drives.

**Media Format**

Can format media to ExFAT  
(Windows/Mac) or HFS+ (Mac)  
file systems.

---

**Supported Codecs**

ProRes HQ QuickTime, ProRes 422  
QuickTime, ProRes LT QuickTime,  
ProRes Proxy QuickTime for all  
formats up to 4320p60. H.265 High,  
H.265 Medium, H.265 Low for all  
progressive formats up to 4320p60.

---

**Scopes****Scopes**

Waveform, RGB Parade, Vector and  
Histogram scopes in broadcast  
quality 10-bit.

**Viewing Modes**

Picture in picture, picture overlay with  
opacity control. Waveform and RGB  
parade with standard and HDR  
graticules and Vector with zoom.

---

## Computer Capture

None

---

## Control

### **Built in Control Panel**

Integrated capacitive touchscreen LCD with onscreen controls for settings and navigating menus.

### **External Control**

RS-422 deck control, SDI start/stop, timecode run. Includes Blackmagic HyperDeck Ethernet Protocol.

---

## Software

### **Software Included**

Blackmagic HyperDeck Operating System  
Blackmagic HyperDeck Setup

### **Internal Software Upgrade**

Loaded at system start, or via Blackmagic HyperDeck Setup using USB port.

---

## Operating Systems



Mac 10.13 High Sierra,  
Mac 10.14 Mojave or later.



Windows 8.1 or Windows 10.

---

## Displays

Built in LCD for video, audio and timecode monitoring and menu settings.

---

## Power Requirements

### **Power Supply**

1 x Internal 100 - 240V AC.  
1 x 4 pin XLR 12V DC IN for external power or battery use.

---

---

## Accessories

### Optional Accessories

HyperDeck Extreme Control

HyperDeck Extreme Rack Mount Kit

---

## Physical Installation

3 rack units height, half rack width.

---

## Physical Specifications



---

## Environmental Specifications

### Operating Temperature:

0° to 40° C (32° to 104° F)

### Storage Temperature:

-20° to 60° C (-4° to 113° F)

### Relative Humidity:

0% to 90% non-condensing

---

## What's Included

HyperDeck Extreme 8K HDR

SD card with user manual.

---

## Warranty

12 Month Limited  
Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2019, all rights reserved.  
All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs.  
This website uses remarketing services to advertise on third party websites to previous visitors to our site.  
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller