

# Ultimatte 12 HD



Ultimatte 12 HD is an advanced real time compositing processor designed for keying live action video with next generation broadcast graphics, virtual sets and more. Ultimatte 12 HD features new algorithms and color science, incredible edge handling and color separation, amazing color fidelity, and better spill suppression than ever before. The high performance 3G-SDI design gives you the power to work in HD with sub pixel processing for an amazing image.

\$895

# Connections

<b>SDI Video Inputs</b> 5
SDI Video Outputs 4
SDI Video Loop Outputs
1 reclocked SD or HD Camera FG

**SDI Rates** 270Mb, 1.5G, 3G.

Video Input Re-Sync On all inputs.


**Reference Connections** 1 x BNC ln, 1 x BNC Out. Tri-Sync or Black Burst. GPIO DE15

### Ethernet

Up to 1Gb/s for device control and loading stills into Media Pool.

#### **Computer Interface**

1 x USB-C 3.0 for device configuration and software updates.

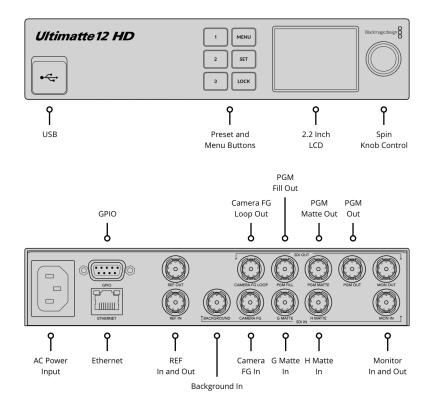

### Standards

#### SD Video Standards

525i59.94 NTSC, 625i50 PAL

#### HD Video Standards

720p50, 720p59.94, 720p60 1080i50, 1080i59.94, 1080i60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60 1080PsF23.98, 1080PsF24, 1080PsF25, 1080PsF29.97, 1080PsF30

#### **SDI Compliance**

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 424M, SMPTE 425M level A and B.

#### Video Sampling

4:2:2

#### **Color Precision**

10-bit

### **Color Space** REC 601, REC 709, REC 2020.

**Multiple Rate Support** Auto detection of SD and HD.

### **Composite Sources**

**Foreground** 1 x 3G-SDI In with Loop Out

Background 1 x 3G-SDI In Still from Media Pool

Background Matte Internal Window Still from Media Pool

### **Garbage Matte** 1 x 3G-SDI In

Internal Window Still from Media Pool

#### **Holdout Matte**

1 x 3G-SDI In Internal Window Still from Media Pool **Layer** Still from Media Pool

Layer Matte Internal Window Still from Media Pool

# Composite Outputs

Fill 1 x 3G-SDI	<b>Matte</b> 1 x 3G-SDI	<b>Program</b> 1 x 3G-SDI
Monitor		
Monitor In 1 x 3G-SDI for monitor cascade Monitor Out 1 x 3G-SDI	For monitoring Program, Foreground Input, Background Input, Combined Matte, Internal Matte, Fill Out, Layer Input, Background Matte Input, Garbage Matte Input, Holdout Matte Input, Layer Matte Input, Processed Layer Matte, Processed Holdout Matte, Processed Garbage Matte, Processed Background Matte, Screen Correction.	
Media Pool		
Background Still Image Formats TGA, TIFF, BMP, PNG, JPG.	<b>Layer Image Still Image Formats</b> TGA, TIFF, BMP, PNG, JPG.	Holdout Matte Still Image Formats TIFF, BMP, PNG, JPG.
Background with Alpha Still Image Formats TGA, TIFF, BMP.	<b>Layer with Alpha Still Image Formats</b> TGA, TIFF, BMP. <b>Garbage Matte Still Image Formats</b> TIFF, BMP, PNG, JPG.	<b>Media Pool Memory</b> 6GB non-volatile internal storage.

# Displays

Built in 2.2 inch color display for device name, video preview, video standard audio meters, status and menus.

### Control

### Front Panel

2.2 inch color display, 3 preset buttons, 3 menu buttons and spin knob.

#### **Control Connection**

Network or direct Ethernet connection to a computer running Ultimatte Software Control or Ultimatte Smart Remote 4.

### Software Control

Ultimatte Software Control supported on Mac<sup>™</sup> or Windows<sup>™</sup> computers.

#### Hardware Control Panel

Ultimatte Smart Remote 4

### **Custom Control**

Ethernet protocol and GPIO pin out included in the <u>Ultimatte instruction</u> manual.

### Software

### Software Updates

Using USB-C or Ethernet connection to Mac<sup>™</sup> or Windows<sup>™</sup> computers.

### Configuration

Ultimatte IP address is set via the front panel or Ultimatte setup utility connected via USB.

# **Operating Systems**



Mac 11.0 Big Sur, Mac 12.0 Monterey or later.



Windows 10, 64-bit. Windows 11.

### **Power Requirements**

Power Supply	Power Usage
1 x Internal 100-240V AC, 50/60Hz	15W

### Accessories

**Optional Accessories** Ultimatte Smart Remote 4

# Physical Installation

Half rack unit width, 1 rack unit height.

# Physical Specifications



**Environmental Specifications** 

**Operating Temperature** 0° to 40°C (32° to 104°F) Storage Temperature -20° to 60°C (-4° to 140°F) **Relative Humidity** 0% to 90% non-condensing.

What's Included

Ultimatte 12 HD Welcome wallet with QR code for software download

### Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2022, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. Privacy Policy

Blackmagic Design Authorized Reseller