
DRACAST

BOLTRAY PLUS SERIES LED5000 DAYLIGHT (5600K)

The Boltray Plus Series is a high-output, point source lighting fixture from Dracast. Available in four variations, each Boltray Plus model features a COB (chip-on-board) integrated LED array that provides the perfect solution of size, power, performance, and value. The 5000 model is a 500W fixture with fixed color temperature at 5600K and a CRI rating of 97+ for state of the art color stability, accuracy, and lumen output.





BOLTRAY PLUS LED500 BICOLOR DRBRP5000D	00 23947 lux / 2183 fc	4658 lux / 433 fc	2394 lux / 222 fc	1498 lux / 139 fc
BOLTRAY PLUS LED500 BICOLOR WITH INCL REFLECTOR DISH DRBRP5000D + REFLECTOR	80000+ lux / 7432+ fc	28045 lux / 2605 fc	12099 lux / 1124 fc	6737 lux / 626 fc
	Spot Focus 12 Degrees			
BOLTRAY PLUS LED500 BICOLOR WITH OPT	00 80000+ lux / 7432+ fc	30487 lux / 2832 fc	12323 lux / 1145 fc	6402 lux / 595 fc
SPOT / FLOOD LENS DRBRP5000D + DRF2XATM	Flood Focus 40 Degrees			
	70137 lux / 6516 fc	19029 lux / 6516 fc	8857 lux / 823 fc	4863 lux / 452 fc
BOLTRAY PLUS LED500 BICOLOR WITH OPT 48" SOFTBOX DRBRP5000D + DRSB48B	00 13922 lux / 1293 fc	4310 lux / 400 fc	1740 lux / 162 fc	1000 lux / 93 fc
DRBRP5000D	Dracast Boltray Plus Series 5000 Daylight LED point source light. 500W LED COB array with 5600K Daylight Color Temperature .			
DRF2XATM	Spot / Flood lens attachment for Dracast Boltray Plus Series Lights. Adjustable from 12 degree spot angle to 40 degree flood angle.			
DRSB48B	Softbox accessory for Dracast Boltray Plus Series Lights. Includes dual layer diffusion, collapsible frame, and removeable egg crate grid.			



DRACAST








DRF2XATM Spot / Flood Lens



DRSB48B Softbox w/ Grid

Quad V-Mount Battery Plates



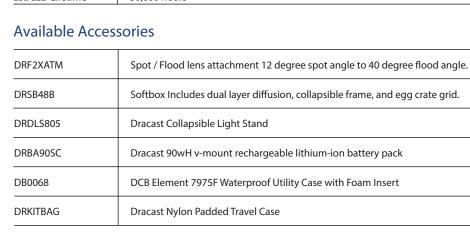

Specifications Details

Specifications	Details	
Optical System	High output chip-on-board (COB) integrated LED array.	
Light Aperture	2.0" diameter LED array surface.	
Beam Angle	ingle 180 degrees	
Weight	5.75 lbs (2.61 kg) fixture. 7.0 lbs (3.17 kg) power ballast	
Handling	Anodized Aluminum Mounting Yoke, Dual Point Locking Tilt	
Mounting	Baby 5/8" Pin	
Tilt Angle	+/- 360 degrees	
Voltage Input	57.6 V DC	
Power Consumption	wer Consumption 500 W	
Power Connection	PowerCon Twist Lock Connector, 100 - 240 VAC, 50 - 60 Hz, 8.6 A	
Battery Connection	Dual V-Mount Battery Plate (included)	
Battery DC Voltage 57.6 V DC (Quad input 14.4V DC li-ion v-mount batteries)		
Battery Light Output	100% of Total Output	
Color Temperature	5600K (Fixed "Daylight" color temperature)	
Color Rendition	CRI > 97	
Dimming	10% - 100% Continuous	
Controls	Local On-Board Manual Controls, 99 Channel 2.4Ghz Wireless Remote, DMX I/O	
Housing Color	Blue / Black	
Housing Build	Aluminum / Plastic	
Est. LED Lifetime	50,000 hours	