

# ATEM 4 M/E Advanced Panel



This massive model is big enough to perfectly match the features on the ATEM Constellation switcher! It features 4 M/E rows with 40 input buttons per row and 4 independent system control LCDs for each row. This massive panel includes 24 LCD's for custom labeling of every button on every row!

\$18,485


#### Connections

#### Ethernet

 $4 \times 10/100/1000$  BaseT with loop output for additional control panels or computers.

#### **Software Updates**

1 x USB-C for firmware updates.

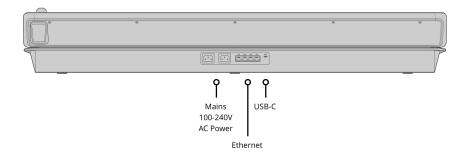

## **Product Specifics**

Number of Mix Effects Rows	<b>Crosspoint Label</b> 10 rows 24 character LCD	<b>DSK Transition Selectors</b> Auto, Cut, Tie/Preview x 4
Direct Cross Points 40	<b>Next Transition Selectors</b> 4 x BKG, Key 1 - Key 4.	Preview Transition
Shifted Cross Points 80	<b>On-Air indicator</b> 20	<b>Transition Rate Displays</b> Via main menu

Menu Control

20 buttons x 4

**Dedicated Macro Buttons** 

4 x 40

**Transport Control Buttons** 

24

**Destination Bus** 

4

**Source Select Bus** 

Fader Bar

4

3 Axis Joystick

Numeric Keypad

1

### Software

### **Software Applications**

ATEM Software Control Panel.

## **Operating Systems**



Mac 10.14 Mojave, Mac 10.15 Catalina or later.



Windows 10, 64-bit.

## Power Requirements

Input Voltage

2 x Internal 100 - 240V AC.

**Redundant Power** 

**Power Usage** 

250W

# Physical Specifications



Environmental Specifications			
Operating Temperature 0° to 40° C (32° to 104° F)	Storage Temperature -20° to 60° C (-4° to 140° F)	<b>Relative Humidity</b> Up to 95%	
What's Included			
ATEM 4 M/E Advanced Panel			
Warranty			
12 Month Limited Manufacturer's Warra	nty.		
	s website uses remarketing services to advertise o	arks are property of their respective owners. MSRP includes on third party websites to previous visitors to our site. You can	
Blackmagic Design Authorized	Reseller		